

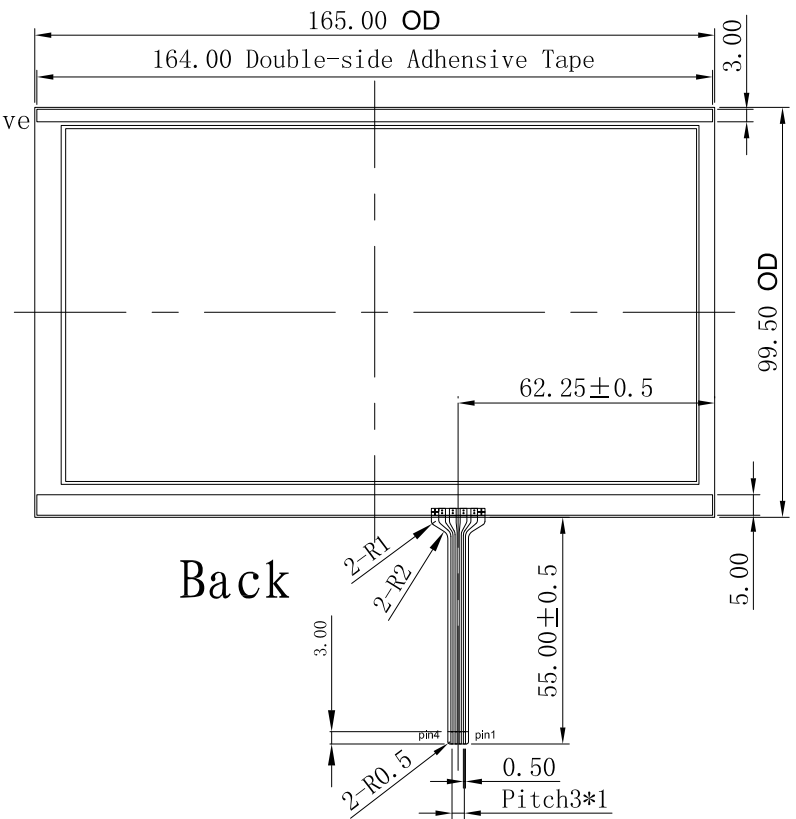


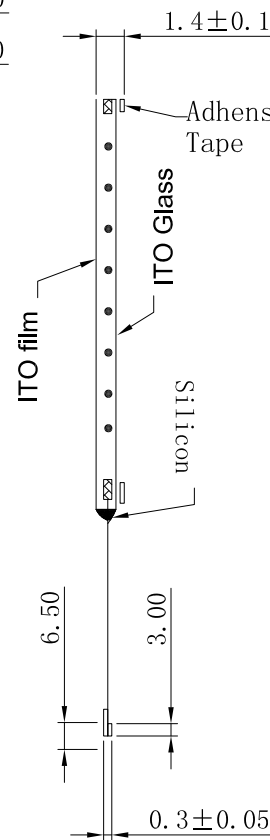

由 Autodesk 教育版产品制作

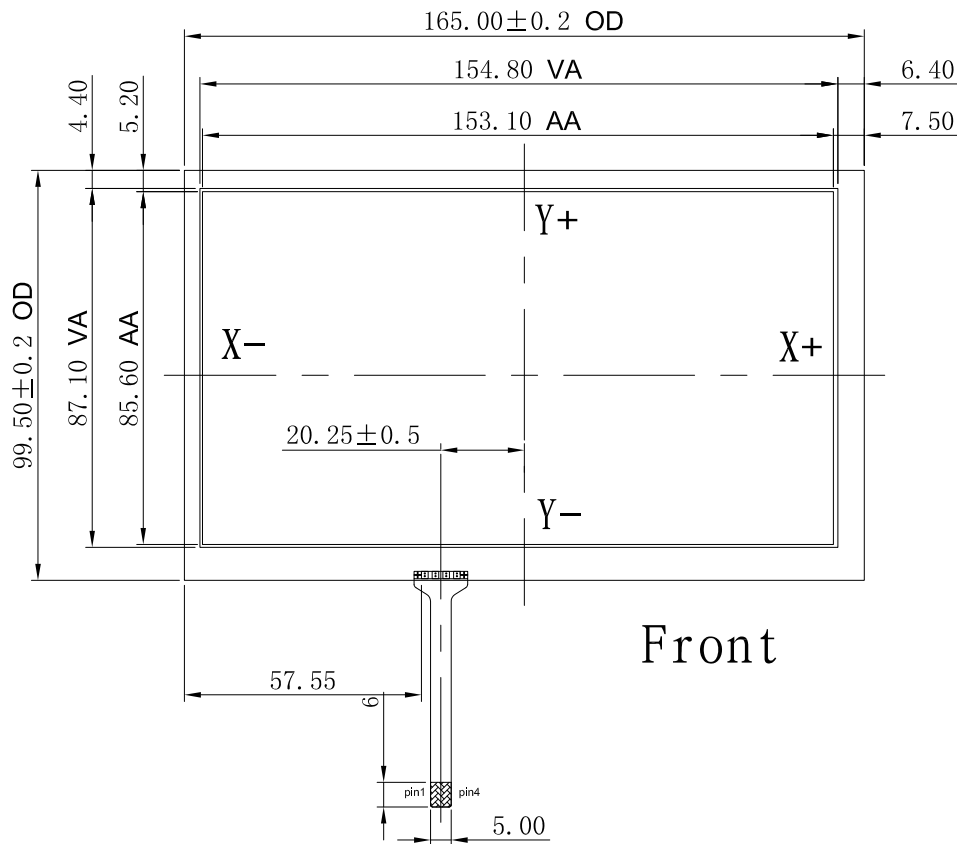

Note:

1. Structure: film+glass+FPC
 Film: Bright screen (0.188mm)
 Glass: $500 \Omega / \square$ (1.1mm)
 Tail: FPC (pitch=1.0mm)
2. Operating voltage: 5.0V
3. Voltage: DC5V 1mA
4. Insulation resistance: $\geq 20M \Omega$ (25V DC)
5. Linearity: $\leq 1.5\%$
6. Transmittance: $\geq 75\%$
7. Operation force: 20-100g
8. Life time: $\geq 1,000,000$
9. Operating temp: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$, $\leq 90\% \text{RH}$
10. Storage temp: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 90\% \text{RH}$
11. X: $400-950 \Omega$ Y: $100-500 \Omega$
12. Tolerance ± 0.20

PIN	OUT
1	X-
2	Y-
3	X+
4	Y+

 EastRising buy-display.com		EastRising Technology Co.,Ltd 深圳市旭日东方科技有限公司	
GENERAL TOL ALL UNITS: 0.20 mm	DATE	MODEL NUMBER :	 SHEET: 1 OF 1 DATE: Feb-02-2013
DWN: Kevin	08/04	ER-TP070-1	
CHK:		DO NOT SCALE THIS DRAWING.	PROJECTION
APP:			